



Disassembling Toshiba T1960CS for HDD Removal

All pictures are annotated

Written By: WayneG



INTRODUCTION

Access to Hard Disk Drive



TOOLS:


- [Phillips #0 Screwdriver](#) (1)
 - [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
-

Step 1 — HDD Removal




- Pry up cover, remove screw.

Step 2

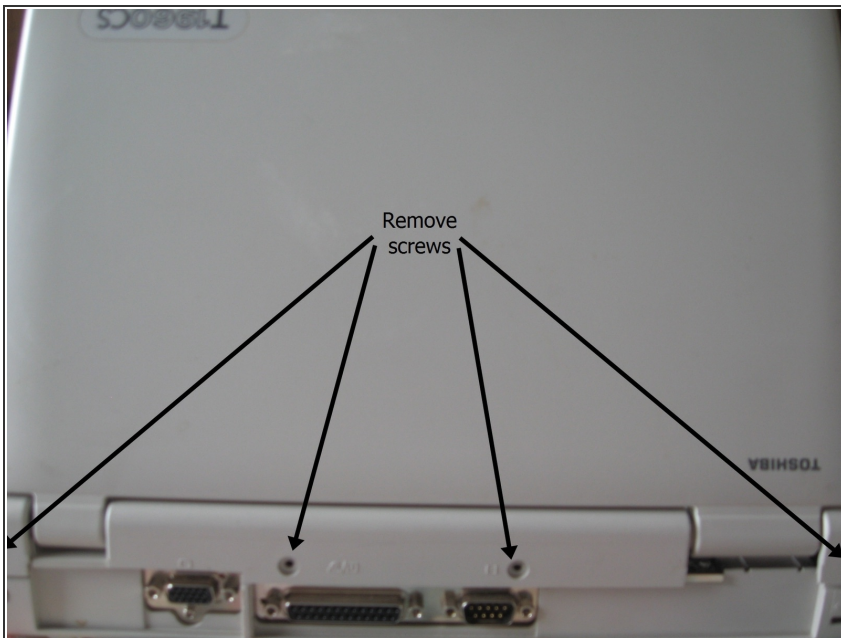


- Remove screws.

Step 3

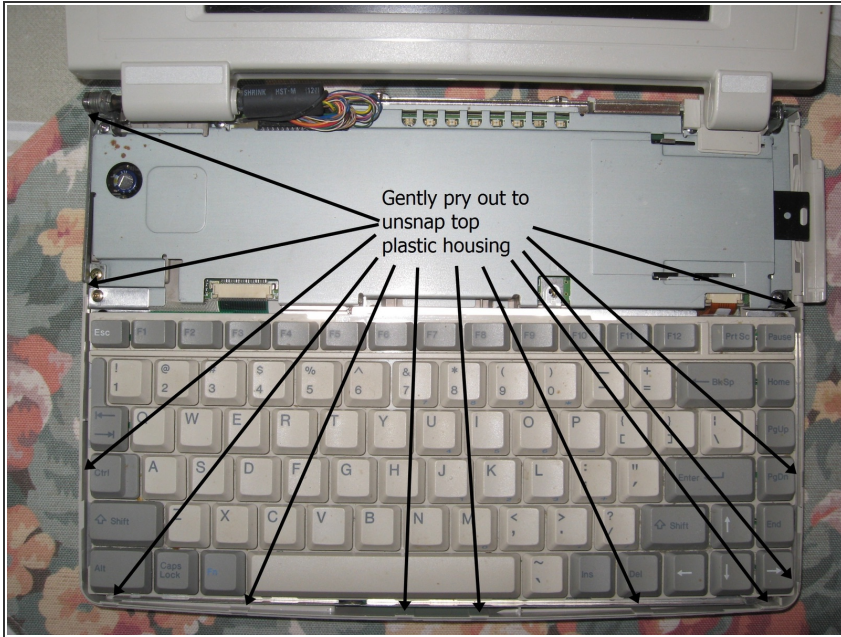


- Gently pry out to unsnap top plastic housing.

Step 4

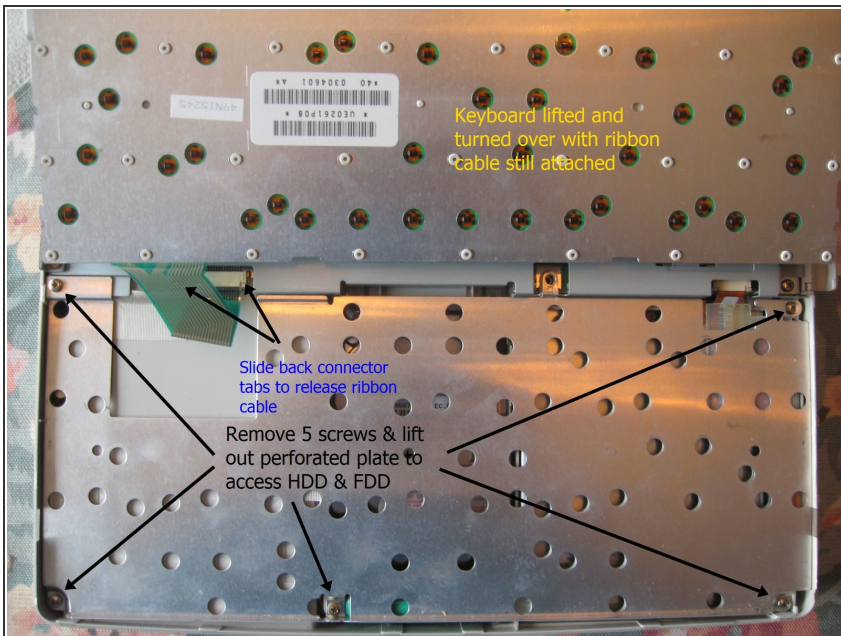

- ① Lift keyboard and flip over, but do not remove, it is still attached by ribbon cable.
- Slide back connector tabs to release ribbon cable.
- Remove 5 screws and lift out plate to access HDD and FDD.

Step 5

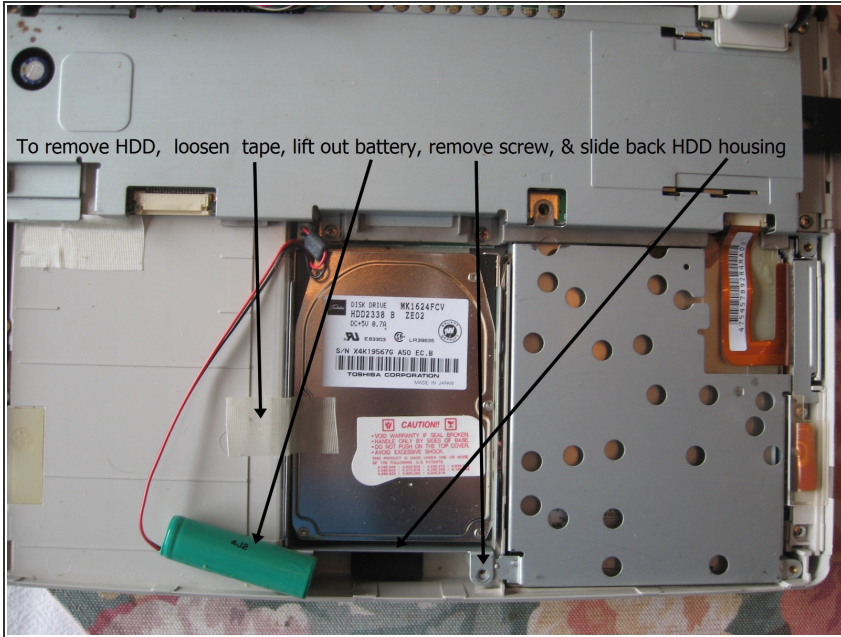

- To remove HDD loosen tape, lift out BIOS battery, remove screws and slide back HDD housing.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 03:27:59 AM.